



MAGNETIZER / DEMAGNETIZER MAGNE TOUCH

Instruction Manual


Model No. : MT-F / MT-G

Thank you for purchasing MAGNE TOUCH.


Before use, please read this manual thoroughly to insure proper operation and long service.

PARTS IDENTIFICATION

■ MT-F



■ MT-G

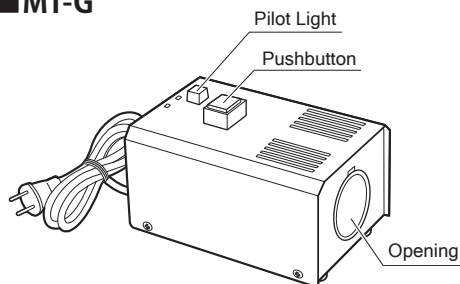

SPECIFICATIONS

Model No.	MT-F	MT-G
Opening Size	φ15×50mm (ID x Length)	φ40×62mm (ID x Length)
Pulling Force	0.17N (When used on φ6 S45C carbon steel driver)	
Rated Voltage	AC100V	
Frequency	50/60Hz	
Current	1.3A	5A
Rated Power	125W	275W
Thermal Protection Circuit	80°C ± 5°C	
Cord Length	~1.6m	
Mass	0.45kg	1.4kg


FEATURES·APPLICATIONS

- For demagnetizing drill bits, taps, reamers, end mills, etc. For magnetizing screwdriver tips.
- Driver tips can be magnetized to hold fasteners when inserting or removing them in hard to reach places.
- Well suited for demagnetizing knives.

HOW TO USE


● To Magnetize

Insert the workpiece such as a Drill Bit into the Opening and press and hold the Pushbutton for 1-2 seconds. Then remove workpiece.

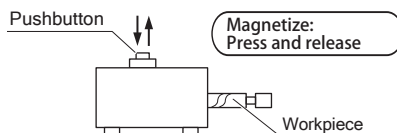

● To Demagnetize

Insert the workpiece into the Opening, and while holding the Pushbutton down, slowly pull the workpiece out taking about 2-3 seconds.



● Thermal Protection Circuit

If the internal coil temperature reaches the overtemp setting of 80±5°C, the current will be switched off automatically. When the coils cool down the unit will return to normal operation.

△ NOTICES

- Only use at rated voltage.
- When demagnetizing knives and blades, please use caution to prevent injury.
- Keep out of reach of children.
- Handle with care. Do not drop instrument.
- Do not pull or mishandle Power Cord
- Keep out of direct sunlight. Do not use in wet or damp locations, or subject to high or low temperatures.
- Use only as directed. Misuse may cause accident or injury.

SK Niigata Seiki Co., Ltd.

5-3-14, Tsukanome, Sanjo, Niigata, Japan, 955-0055
Tel. : +81-256-33-5522 Fax. : +81-256-33-5518
MAIL intl.sales@niigataseiki.co.jp
URL <http://www.niigataseiki.co.jp>